




# WSK 40

Wound current transformer

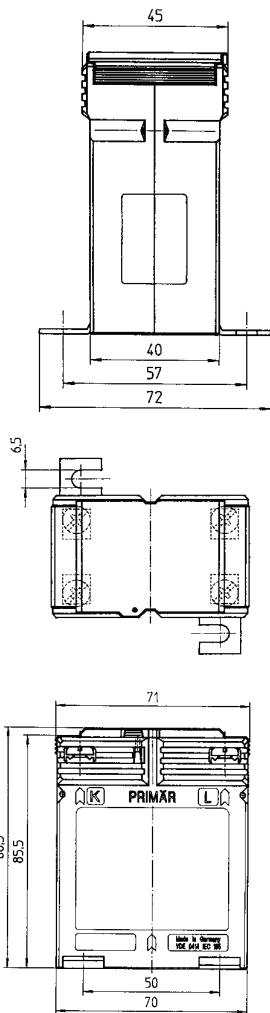

Secondary current		5A		1A	
Primary current A	Burden VA	Accuracy class		Accuracy class	
		1	0.5	1	0.5
		Art.-no.	Art.-no.	Art.-no.	Art.-no.
1	2.5	31044	31011	31244	31211
	5	31045	31012	31245	31212
	10	31046	31013	31246	31213
	15	31047	31014	31247	31214
2.5	2.5	31048	31015	31248	31215
	5	31049	31016	31249	31216
	10	31050	31017	31250	31217
	15	31051	31018	31251	31218
5	2.5	31052	31019	31252	31219
	5	31053	31020	31253	31220
	10	31054	31021	31254	31221
	15	31055	31022	31255	31222
10	2.5	31056	31023	31256	31223
	5	31057	31024	31257	31224
	10	31058	31025	31258	31225
	15	31059	31026	31259	31226
15	2.5	31060	31027	31260	31227
	5	31061	31028	31261	31228
	10	31062	31029	31262	31229
	15	31063	31030	31263	31230
20	2.5	31064	31031	31264	31231
	5	31065	31032	31265	31232
	10	31066	31033	31266	31233
	15	31067	31034	31267	31234
25	2.5	31068	31035	31268	31235
	5	31069	31036	31269	31236
	10	31070	31037	31270	31237
	15	31071	31038	31271	31238
30	2.5	31072	31039	31272	31239
	5	31073	31040	31273	31240
	10	31074	31041	31274	31241



Snap-on mounting

Primary conductor	—
Round conductor	—
Transformer width	71 mm
Snap-on mounting	<b>Art.-no. 55012</b> see page 204
Sealed shutter	<b>Art.-no. 59041</b> see page 205